


ANNUBAR TEST VALVE ASSEMBLY

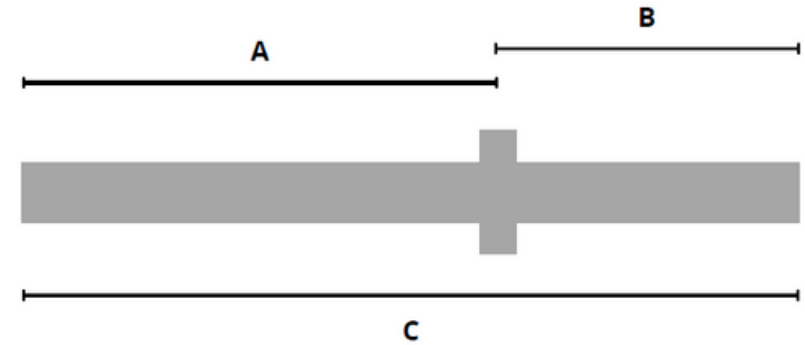

Pipe Dimensions (mm)

OD	DIA	A	B	C
60.3	50nb	540	360	900
76.1	65nb	684.9	456.6	1141.5
88.9	80nb	809.1	539.4	1348.5
114.3	100nb	1033.2	688.8	1722
165.1	150nb	1485.9	990.6	2476.5

Components

- Roll Grooved Butterfly Valve
- Roll Grooved Throttling/Balancing Valve
- Galvanised Pipe c/w 2 x 15mm paps
- Accutube Flow Sensor - Single mount (optional)
- Roll Groove Coupling X 2

Technical Data

- Size Range 50nb - 150nb
- Working Pressure - 1600kPa
- End Connection - Roll Grooved

Standards

- AS1074-1989 -Pipe Standard
- AS/NZS 4680:2006 - Hot dip galvanised